



MK600.04NI

NOT INSULATED FAST RECOVERY DIODE MODULE

Output Current **600 A**

Blocking Voltage **400 V**



V_{RRM} [V]	V_{RSM} [V]	V_{OUT} [V]	P/N
400	500	125	MK600.04 NI

Features







- Short recovery time
- Low switching losses
- Soft recovery behavior

Applications

- Antiparallel diode for high frequency switching devices
- Free-wheeling diode in converters or motor controllers
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Diodes characteristics		Conditions	T_j [°C]	Value
$I_{F(AV)}$	Average forward current	$T_c = 84^\circ\text{C}$		300 A
I_{FRM}	Repetitive forward current, max	Square wave, 20 kHz		500 A
I_{RRM}	Max repetitive peak reverse current	$V = V_{RRM}$	150	4 mA
$V_{F(TO)}$	Threshold voltage		150	0,84 V
r_F	Forward slope resistance		150	0,5 m Ω
V_{FM}	Peak forward voltage, max	$I_F = 300$ A	150	1,18 V
I_{FSM}	Surge forward current	Half sine wave, 10 ms	25	2800 A
I^2t	Max I^2t for fusing		25	39200 A ² s
C_T	Junction capacitance, typ	$V = V_{RRM}$	25	360 pF
Q_{rr}	Reverse recovery charge, typ	$I_F = 300$ A	125	2500 nC
I_{rr}	Reverse recovery current, typ	$V_R = 200$ V		25 A
t_{rr}	Reverse recovery time, typ	$dI_F / dt = 200$ A / μ s		200 ns
T_{jmax}	Operating junction temperature			-40 / 150 °C
$R_{th(j-c)}$	Thermal resistance (junction to case)			0,19 °C/W

Module characteristics		Conditions	Value
I_{OUT}	Output current (center tap connection)	$T_c = 84^\circ\text{C}$	600 A
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Mounting surface flat, smooth and greased	0,150 °C/W
T_{stg}	Max storage temperature		150 °C
W	Weight		117 g
M_1	Mounting torque, $\pm 15\%$		5,5 N·m
			48 lb·inch
M_2	Terminal connection torque, $\pm 15\%$		4,0 N·m
			35 lb·inch

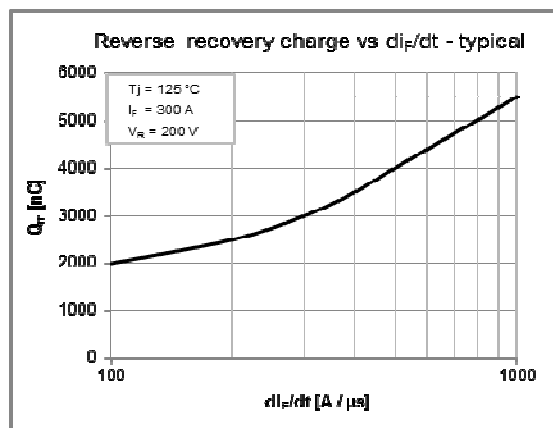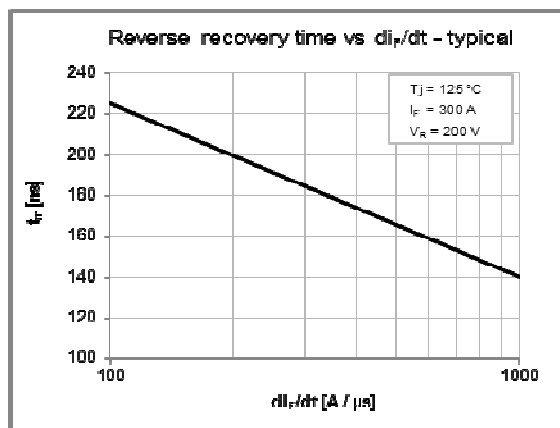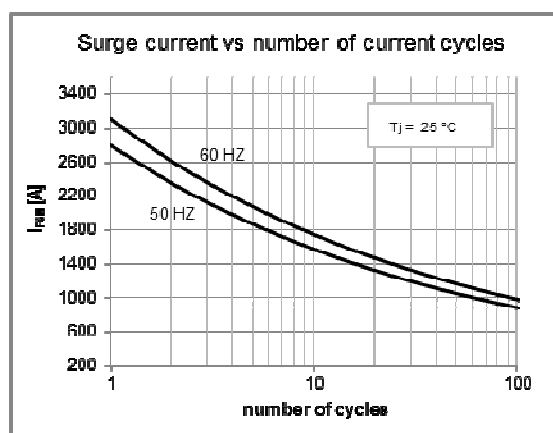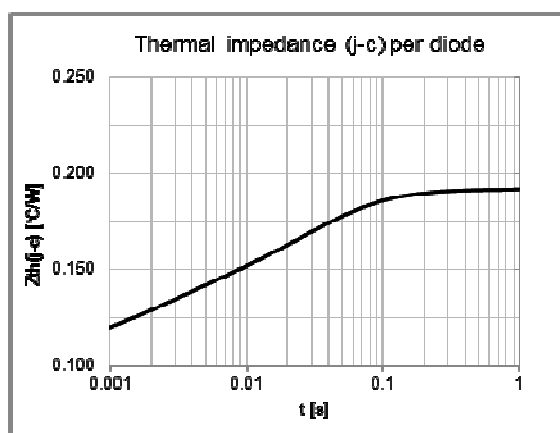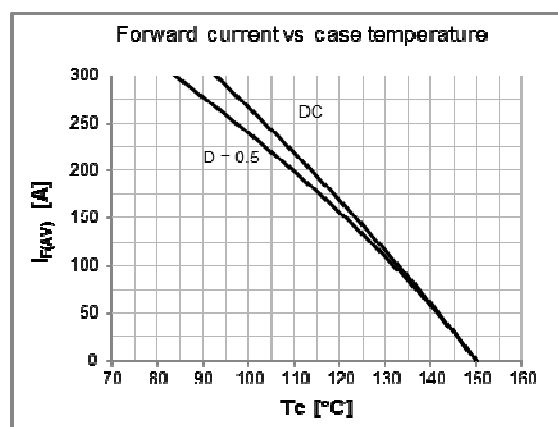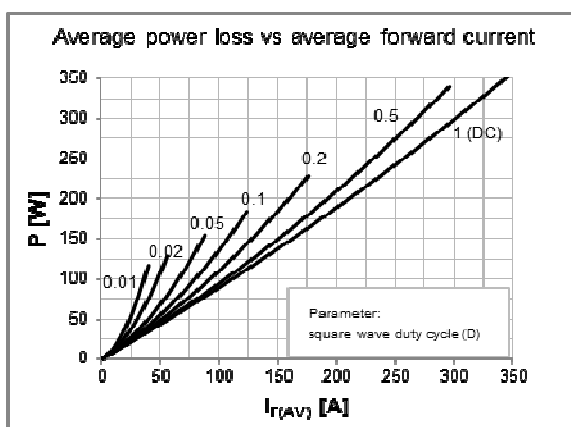

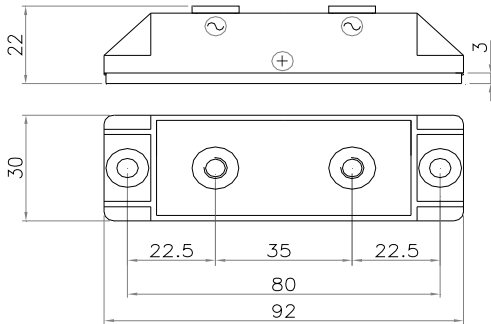


Fig.1 MK600.04NI-SS6-FIX5-HP-P80-TA

Code:MK4006000039

MK600.04NI-SS5-FIX5-HP-P80-TA

Code:MK4006000037

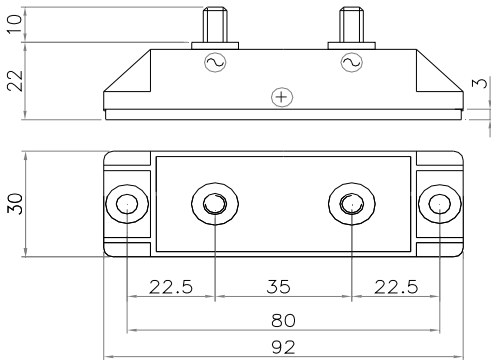


Fig.2 MK600.04NI-MM6x10-FIX5-HP-P80-TA

Code:MK4006000029

MK600.04NI-MM5x10-FIX5-HP-P80-TA

Code:MK4006000021

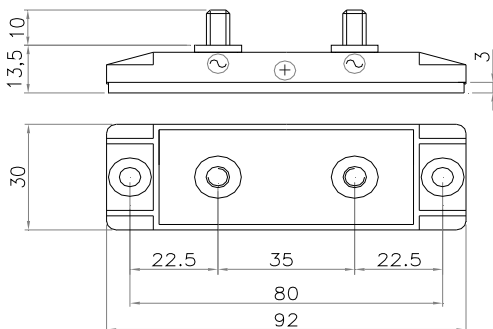


Fig.3 MK600.04NI-MM6x10-FIX5-LP-P80-TA

Code:MK4006000031

MK600.04NI-MM5x10-FIX5-LP-P80-TA

Code:MK4006000023

Power fix:
 SS=Screw (M6 or M5)
 MM=Bolt (M6 or M5)

Mounting fix:
 FIX= $\varnothing 5,5$

Profile:
 HP=High Profile LP=Low Profile

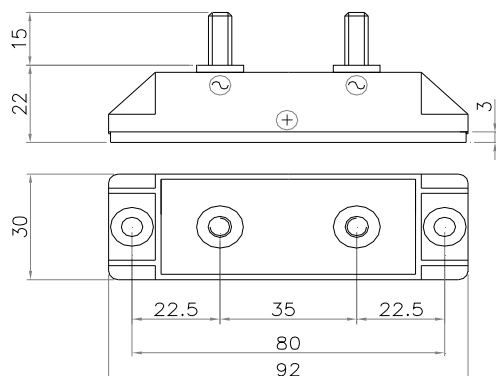


Fig.4 MK600.04NI-MM6x15-FIX5-HP-P80-TA

Code:MK4006000033

MK600.04NI-MM5x15-FIX5-HP-P80-TA

Code:MK4006000025

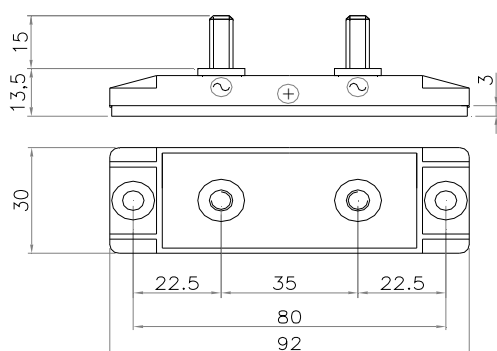


Fig.5 MK600.04NI-MM6x15-FIX5-LP-P80-TA

Code:MK4006000035

MK600.04NI-MM5x15-FIX5-LP-P80-TA

Code:MK4006000027

Power fix:
SS=Screw (M6 or M5)
MM=Bolt (M6 or M5)

Mounting fix:
FIX= Ø5,5

Profile:
HP=High Profile LP=Low Profile

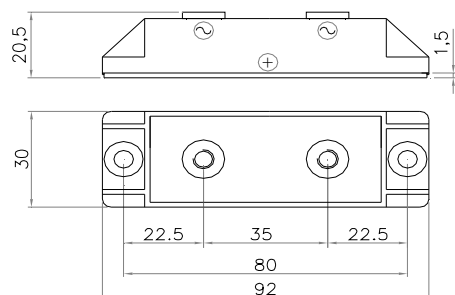


Fig.6 MK600.04NI-SS6-FIX5-HP-P80-TA

Code:MK4006000038

MK600.04NI-SS5-FIX5-HP-P80-TA

Code:MK4006000036

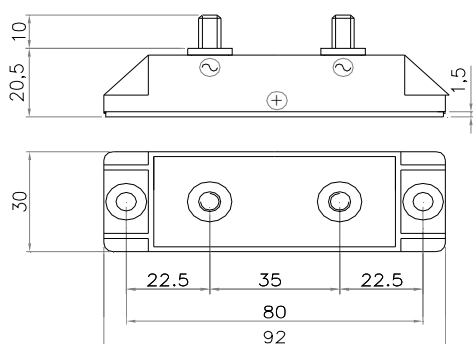


Fig.7 MK600.04NI-MM6x10-FIX5-HP-P80-TA

Code:MK4006000028

MK600.04NI-MM5x10-FIX5-HP-P80-TA

Code:MK4006000020

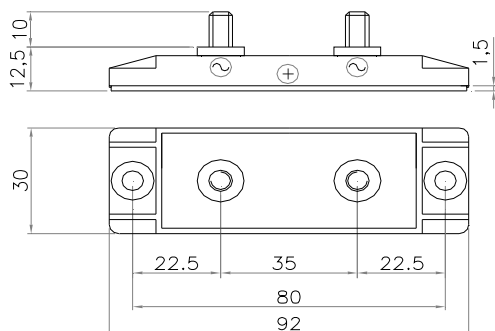


Fig.8 MK600.04NI-MM6x10-FIX5-LP-P80-TA

Code:MK4006000030

MK600.04NI-MM5x10-FIX5-LP-P80-TA

Code:MK4006000022

Power fix:
SS=Screw (M6 or M5)
MM=Bolt (M6 or M5)

Mounting fix:
FIX= $\varnothing 5,5$

Profile:
HP=High Profile LP=Low Profile

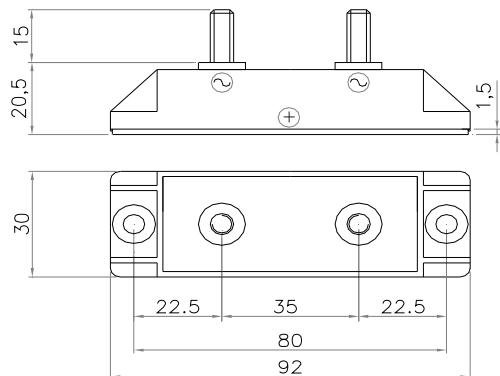


Fig.9 MK600.04NI-MM6x15-FIX5-HP-P80-TA

Code:MK4006000032

MK600.04NI-MM5x15-FIX5-HP-P80-TA

Code:MK4006000024

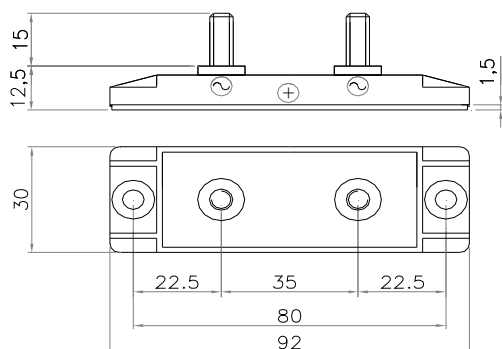


Fig.10 MK600.04NI-MM6x15-FIX5-LP-P80-TA

Code:MK4006000034

MK600.04NI-MM5x15-FIX5-LP-P80-TA

Code:MK4006000026

Power fix:

SS=Screw (M6 or M5)

MM=Bolt (M6 or M5)

Mounting fix:

FIX= Ø5,5

Profile:

HP=High Profile LP=Low Profile