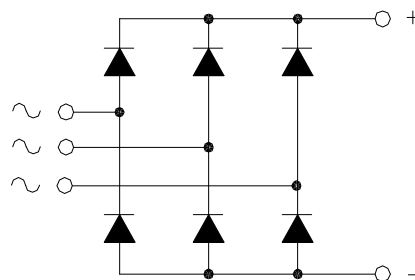




DBM100-HM

POWER RECTIFIER BRIDGE

Output Current **100 A**



V_{RRM}	V_{RSM}	P/N
400	500	DBM100.04
600	700	DBM100.06
800	900	DBM100.08
1200	1300	DBM100.12
1600	1700	DBM100.16

Features

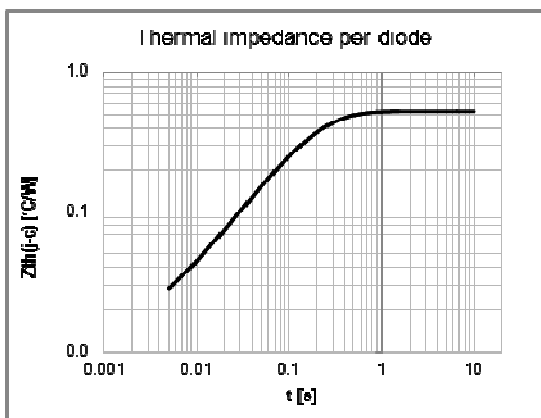
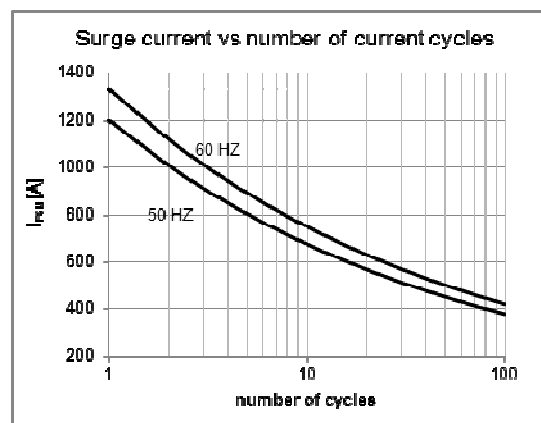
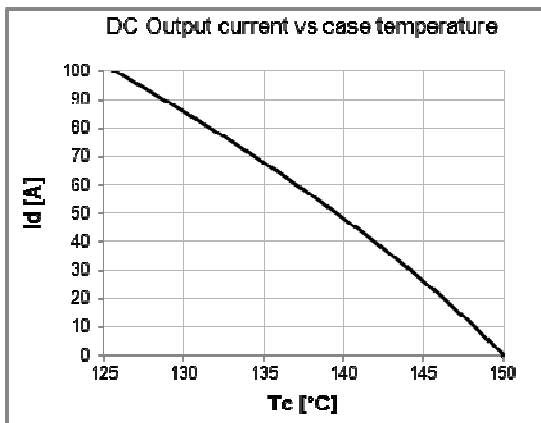
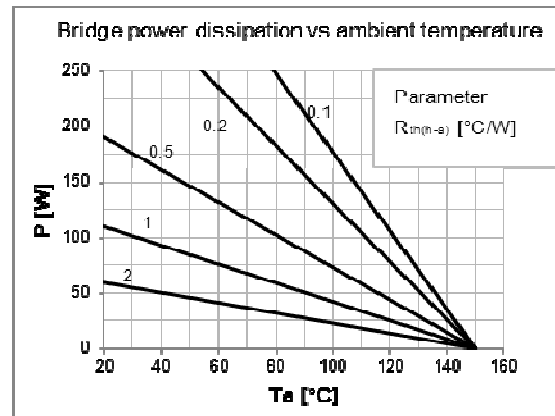
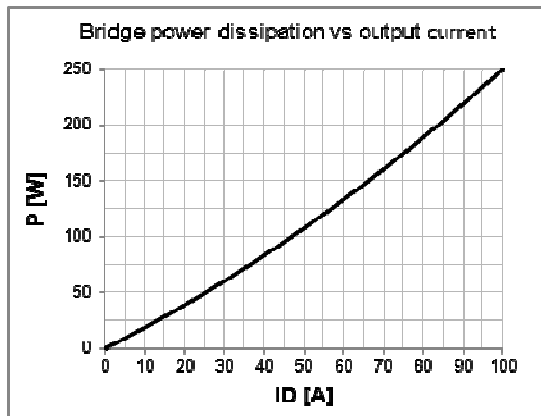
Low forward voltage diodes for high surge capability
Low thermal impedance packaging
Electrically insulated case

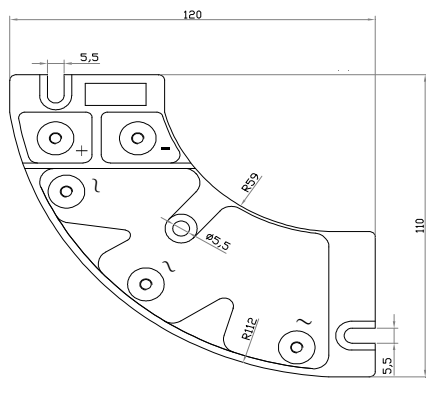
Applications

Input rectifier for variable frequency drives
Battery charger rectifiers
Three phase rectifier for power supplies
Rectifiers for DC motor fields supplies

Diodes characteristics		Conditions	T_j [°C]	Value
I_{RRM}	Max repetitive peak reverse current	$V = V_{RRM}$	150	4 mA
$V_{F(TO)}$	Threshold voltage		150	0,9 V
r_F	Forward slope resistance		150	3,5 mΩ
V_{FM}	Peak forward voltage, max	$I_F = 100A$	25	1,2 V
I_{FSM}	Surge forward current	Half sine wave, 10 ms	150	1200 A
I^2t	Max I^2t for fusing		150	7200 A ² s
T_{jmax}	Operating junction temperature			-40 / 150 °C
$R_{th(j-c)}$	Thermal resistance (junction to case)	DC operation		0,52 °C/W
$R_{th(j-c)}$	Thermal resistance (junction to case)	Rectangular wave 120° conduction		0,58 °C/W

Module characteristics		Conditions	Value
I_D	DC output current	$T_c = 125$ °C	100 A
I_D	DC output current	$T_a = 40$ °C ; freely suspended	8 A
V_{INS}	RMS Insulating voltage	50 / 60 Hz $t = 1$ s ($i < 1$ mA)	3600 V
V_{INS}	RMS Insulating voltage	50 / 60 Hz $t = 60$ s ($i < 1$ mA)	3000 V
$R_{th(j-c)}$	Thermal resistance (junction to case)	DC operation	0,087 °C/W
$R_{th(j-c)}$	Thermal resistance (junction to case)	Rect. wave 120° conduction	0,097 °C/W
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Mounting surface flat, smooth and greased	0,085 °C/W
$R_{th(j-a)}$	Thermal resistance (junction to ambient)	Freely suspended or mounted on an insulator	8,5 °C/W
$R_{th(j-a)}$	Thermal resistance (junction to ambient)	Mounted on a painted metal sheet 250x250x1 mm	3,0 °C/W
T_{stg}	Max storage temperature		150 °C
W	Weight		120 g
M_1	Mounting torque, ± 15 %		3,0 N·m
			26 lb·inch
M_2	Terminal connection torque, ± 15 %		4,5 N·m
			40 lb·inch




Fig.1
DBM100.04-SS5-FIX5-LP-TG

Code:DBM70001000012

DBM100.06-SS5-FIX5-LP-TG

Code:DBM70001000015

DBM100.08-SS5-FIX5-LP-TG


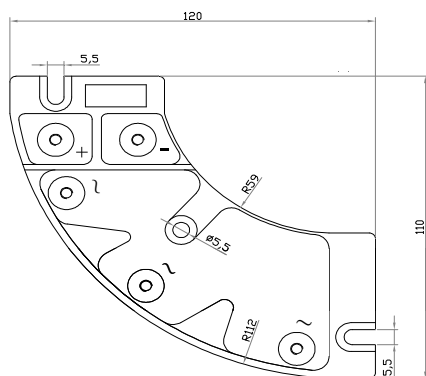
Code:DBM70001000018

DBM100.12-SS5-FIX5-LP-TG

Code:DBM70001000021

DBM100.16-SS5-FIX5-LP-TG

Code:DBM70001000024


Fig.2
DBM100.04-MM5x10-FIX5-LP-TG

Code:DBM70001000010

DBM100.06-MM5x10-FIX5-LP-TG

Code:DBM70001000013

DBM100.08-MM5x10-FIX5-LP-TG


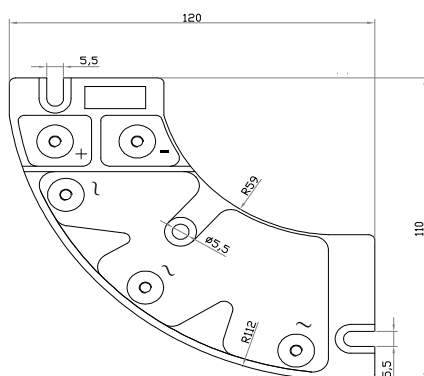
Code:DBM70001000016

DBM100.12-MM5x10-FIX5-LP-TG

Code:DBM70001000019

DBM100.16-MM5x10-FIX5-LP-TG

Code:DBM70001000022


Fig.3
DBM100.04-MM5x15-FIX5-LP-TG

Code:DBM70001000011

DBM100.06-MM5x15-FIX5-LP-TG

Code:DBM70001000014

DBM100.08-MM5x15-FIX5-LP-TG

Code:DBM70001000017

DBM100.12-MM5x15-FIX5-LP-TG

Code:DBM70001000020

DBM100.16-MM5x15-FIX5-LP-TG

Code:DBM70001000023

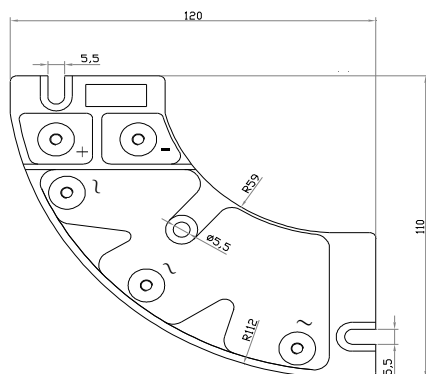
Voltage:04=400V 06=600V 08=800V 12=1200V 16=1600V
Power fix:

SS=Screw (M5)

MM=Bolt (M5)

Mounting fix:

FIX= Ø5,5


Fig.4
DBM100.04-SS6-FIX5-LP-TG

Code:DBM70001000027

DBM100.06-SS6-FIX5-LP-TG

Code:DBM70001000030

DBM100.08-SS6-FIX5-LP-TG


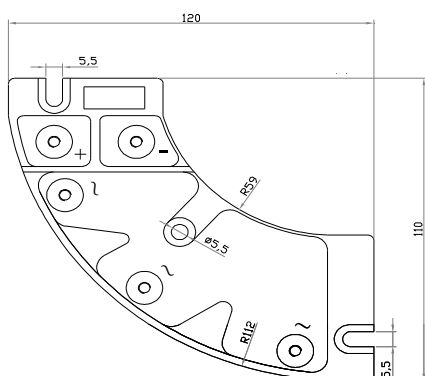
Code:DBM70001000033

DBM100.12-SS6-FIX5-LP-TG

Code:DBM70001000036

DBM100.16-SS6-FIX5-LP-TG

Code:DBM70001000039


Fig.5
DBM100.04-MM6x10-FIX5-LP-TG

Code:DBM70001000025

DBM100.06-MM6x10-FIX5-LP-TG

Code:DBM70001000028

DBM100.08-MM6x10-FIX5-LP-TG


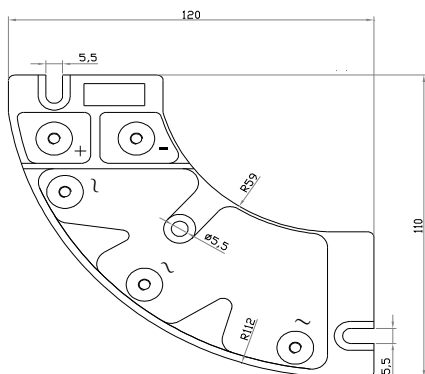
Code:DBM70001000031

DBM100.12-MM6x10-FIX5-LP-TG

Code:DBM70001000034

DBM100.16-MM6x10-FIX5-LP-TG

Code:DBM70001000037


Fig.6
DBM100.04-MM6x15-FIX5-LP-TG

Code:DBM70001000026

DBM100.06-MM6x15-FIX5-LP-TG

Code:DBM70001000029

DBM100.08-MM6x15-FIX5-LP-TG

Code:DBM70001000032

DBM100.12-MM6x15-FIX5-LP-TG

Code:DBM70001000035

DBM100.16-MM6x15-FIX5-LP-TG

Code:DBM70001000038

Voltage:04=400V 06=600V 08=800V 12=1200V 16=1600V
Power fix:

SS=Screw (M6)

MM=Bolt (M6)

Mounting fix:

FIX= $\varnothing$ 5,5