




RADDITAL

www.raddital.com

DBM40-TH

POWER RECTIFIER BRIDGE

Output Current **40 A**

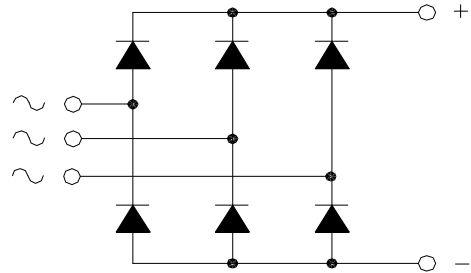

V_{RRM}	V_{RSM}	P/N
1600	1700	DBM40.16-TH

Features







Low forward voltage diodes for high surge capability
Low thermal impedance packaging
Electrically insulated case

Applications

Input rectifier for variable frequency drives
Battery charger rectifiers
Single phase rectifier for power supplies
Rectifiers for DC motor fields supplies

Diodes characteristics		Conditions	T_j [°C]	Value
I_{RRM}	Max repetitive peak reverse current	$V = V_{RRM}$	150	4 mA
$V_{F(TO)}$	Threshold voltage		150	0,9 V
r_F	Forward slope resistance		150	7,0 mΩ
V_{FM}	Peak forward voltage, max	$I_F = 100A$	25	1,7 V
I_{FSM}	Surge forward current	Half sine wave, 10 ms	150	700 A
I^2t	Max I^2t for fusing		150	2450 A ² s
T_{jmax}	Operating junction temperature			-40 / 150 °C
$R_{th(j-c)}$	Thermal resistance (junction to case)	DC operation		1,04 °C/W
$R_{th(j-c)}$	Thermal resistance (junction to case)	Rectangular wave 120° conduction		1,16 °C/W

Module characteristics		Conditions	Value
I_D	DC output current	$T_c = 126$ °C	40 A
I_D	DC output current	$T_a = 40$ °C ; freely suspended	6 A
V_{INS}	RMS Insulating voltage	50 / 60 Hz $t = 1$ s ($i < 1$ mA)	3600 V
V_{INS}	RMS Insulating voltage	50 / 60 Hz $t = 60$ s ($i < 1$ mA)	3000 V
$R_{th(j-c)}$	Thermal resistance (junction to case)	DC operation	0,174 °C/W
$R_{th(j-c)}$	Thermal resistance (junction to case)	Rect. wave 120° conduction	0,193 °C/W
$R_{th(c-h)}$	Thermal resistance (case to heatsink)	Mounting surface flat, smooth and greased	0,100 °C/W
$R_{th(j-a)}$	Thermal resistance (junction to ambient)	Freely suspended or mounted on an insulator	9,0 °C/W
$R_{th(j-a)}$	Thermal resistance (junction to ambient)	Mounted on a painted metal sheet 250x250x1 mm	3,5 °C/W
T_{stg}	Max storage temperature		150 °C
W	Weight		85 g
M_1	Mounting torque, ± 15 %		4,5 N·m
			40 lb·inch

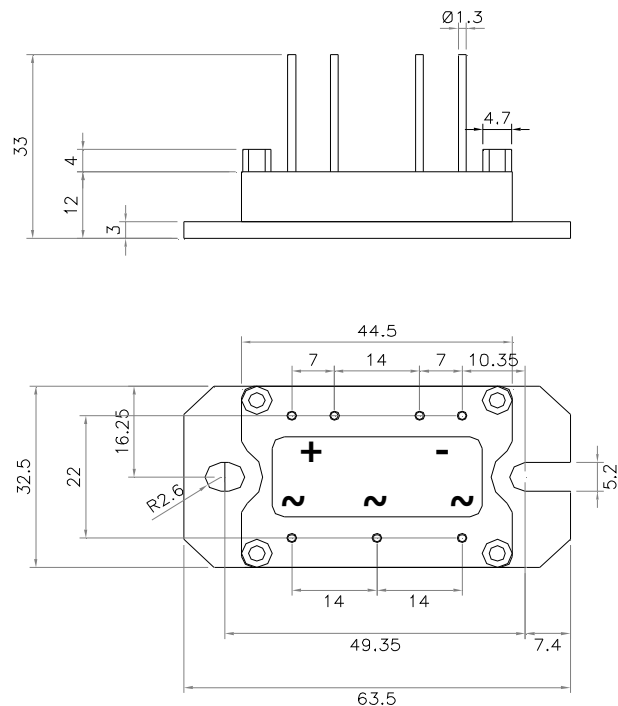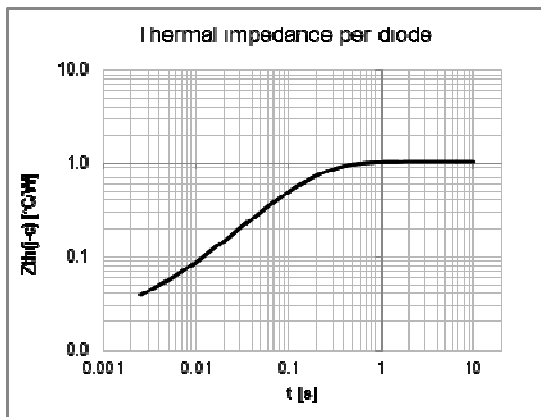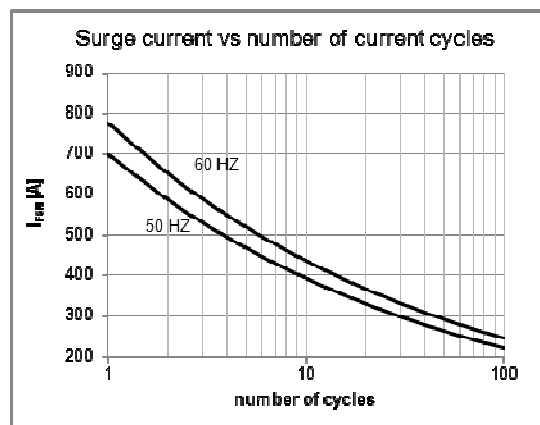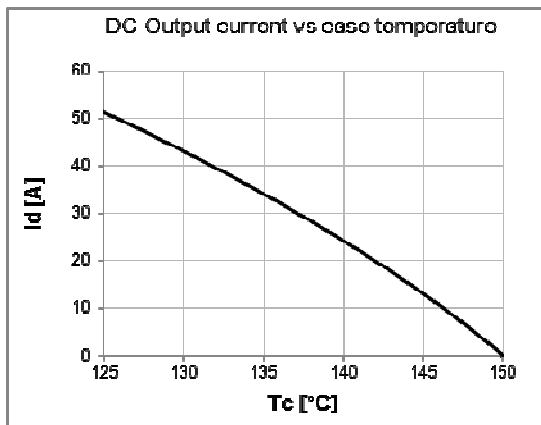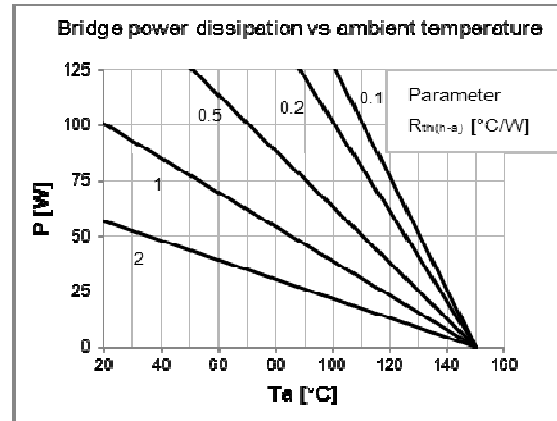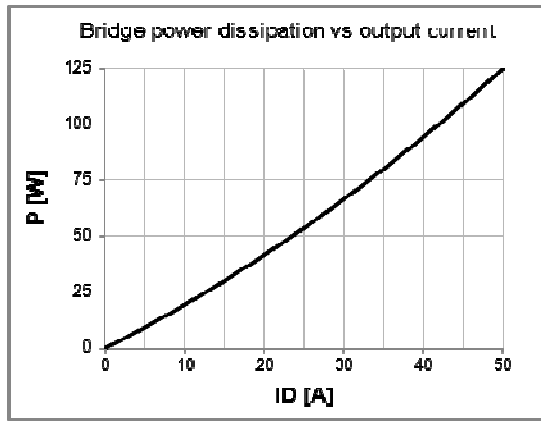

Notes :

To reduce the thermal resistance we recommend to apply a layer of 100..200µm of thermal compound to the heat sink or to the module base.

The flatness tolerance of IMS is 80µm.

DBM40.16-LL-FIX5-LP-P49,35-TH
Code:DBM70000400000

RADDITAL srl reserves the right to change any specification without notice

RADDITAL srl Via Magellano,4 26861 Fombio(LO)-IT

Phone:+39 0377 379298 Fax:+39 0377 33590

issue:mar-2017